



Der G Sub 1001 ist ein kompakter 10" Hochleistungs-Subwoofer in besonders flacher Bauweise. Das moderne Design und seine hohe Leistungsfähigkeit machen den G Sub 1001 für viele Anwendungen interessant, bei denen eine besonders unauffällige Installation und präzise Basswiedergabe wichtig sind.

## PRODUCT SPECIFICATIONS


<b>Speaker Components</b>	10"
<b>Description</b>	Passive Bass Extension
<b>Power</b> AES / Peak	350 W / 1100 W
<b>Impedance</b> nominal	8 Ω
<b>SPL</b> 1 W / Peak @ 1 m	97 dB / 128 dB
<b>Usable Range</b> -6 dB	44 Hz - 300 Hz
<b>Tuning Frequency</b> excursion minimum	53 Hz
<b>Connectors</b>	2 x Neutrik Speakon NL4MP in/out Coding: 1 +/- loop thru, 2 +/- Sub Incl. switch for active / passive operation
<b>Handles</b>	1 x
<b>Rigging / Fittings</b>	M20 on top
<b>Weight</b>	17,0 kg
<b>Size</b> height x width x depth	28,0 x 43,0 x 43,0 cm
<b>Order No.</b>	<b>00605</b>




M20 Flansch auf der Oberseite.



Komfortabler Schalengriff für den einfachen Transport.



## DIMENSIONS

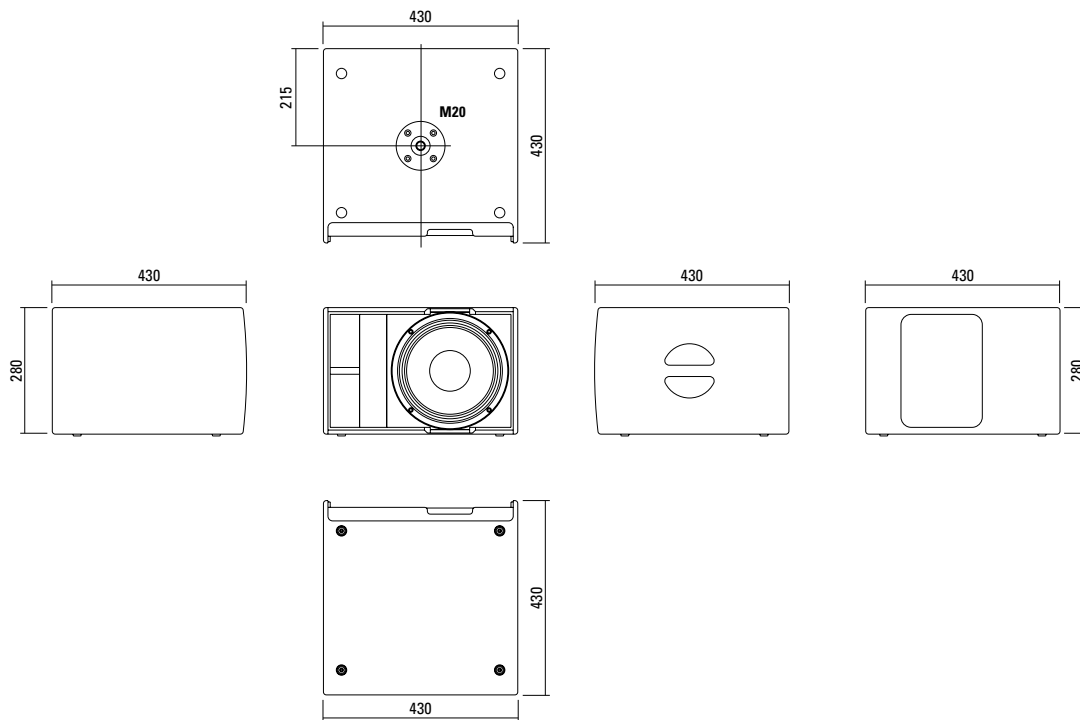


### Controller Setups:


<http://www.seeburg.net/de/downloads>

## MEASUREMENTS

Frequency Response with Presets

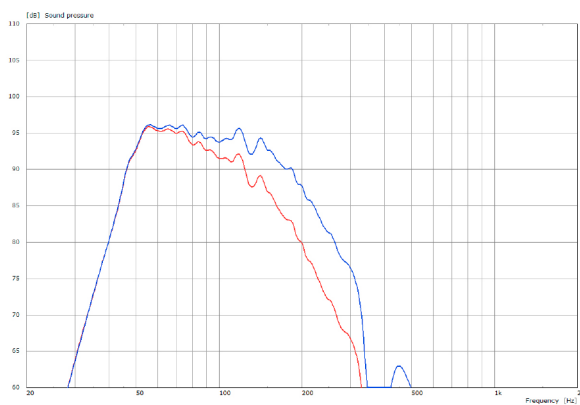

Sensitivity 1 W @ 1 m + Impedance

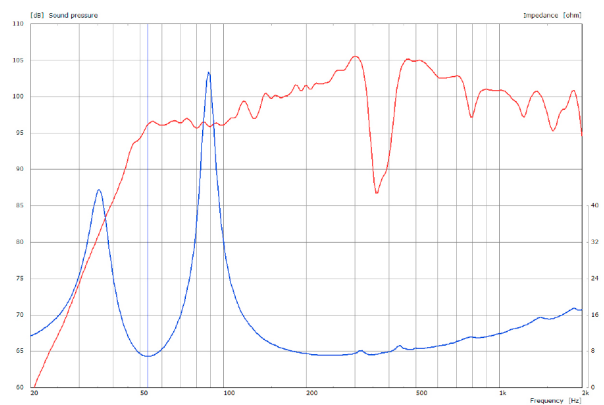

## ACCESSORIES G Sub 1001

### Speaker Pole

M20, with wind up, K&M

Order No. **03023**



M20, adjustable, K&M

Order No. **03022**



### Wall Mount

max. load 40 kg, bar: 269 mm,  
incl. (M10 x 70 mm socket head  
screw, M10 hex lock nut and flat  
washer)

Order No. **08130/F269**

Order No. **08130/F269/w** (RAL 9010)



### Ceiling Mount

for Subwoofer,  
2 parts, incl. screws

Order No. **08129**

Order No. **08129/w** (RAL 9010)



### MultiRigg™ light

version for fixed installations,  
for horizontal and vertical alignment,  
incl. accessories (2 x M10 x 20 socket  
head screws), max. load 50 kg

Order No. **01362**



### Cover

for G Sub 1001, padded

Order No. **01226**

